

DS-K1104 Series

Vandal-Resistant Card Reader

- LED Reader Status Indicator
- Tamper-Resistant Alarm
- Supports Mifare Cards
- Keypad (Option)
- RS-485 and Wiegand (W26/W34) Protocols

Hikvision's DS-K1104 Series vandal-resistant card readers with dip switch are rated IK10. They support RS-485 and Wiegand (W26/W34) protocols. Contains a built-in Mifare 13.56 MHz card reading module. Meets ISO 14443-A standards.

Available Models: DS-K1104M: Mifare card reader
DS-K1104MK: Mifare card reader w/keypad



DS-K1104M




DS-K1104MK

Specifications

	DS-K1104M	DS-K1104MK
Power Supply	12 VDC	
Working Current	≤ 500 mA	
Processor	32-bit	
Reading Frequency	13.56 MHz	
Reading Range	≤ 1.97" (≤ 50 mm)	
ID Settings	DIP switch	
Audio Alert	Beeper	
Power Consumption	≤ 2 W	
Keypad	No keypad	Keypad w/12 keys (0 to 9, *, #)
Certifications	FCC, CE, UL	
LED Indicator	Power indicator; status LED indicator	
Working Temperature	-4° to +149° F (-20° to +65° C)	
Working Humidity	10% to 90% (non-condensing)	
Protection Level	IP 65	
Dimensions	4.65" × 2.99" × 0.91" (118 mm × 76 mm × 23 mm)	
Weight	≤ 18.34 oz (≤ 0.52 kg)	
Installation Method	Applied to 86 and 120 gang box	

Dimensions

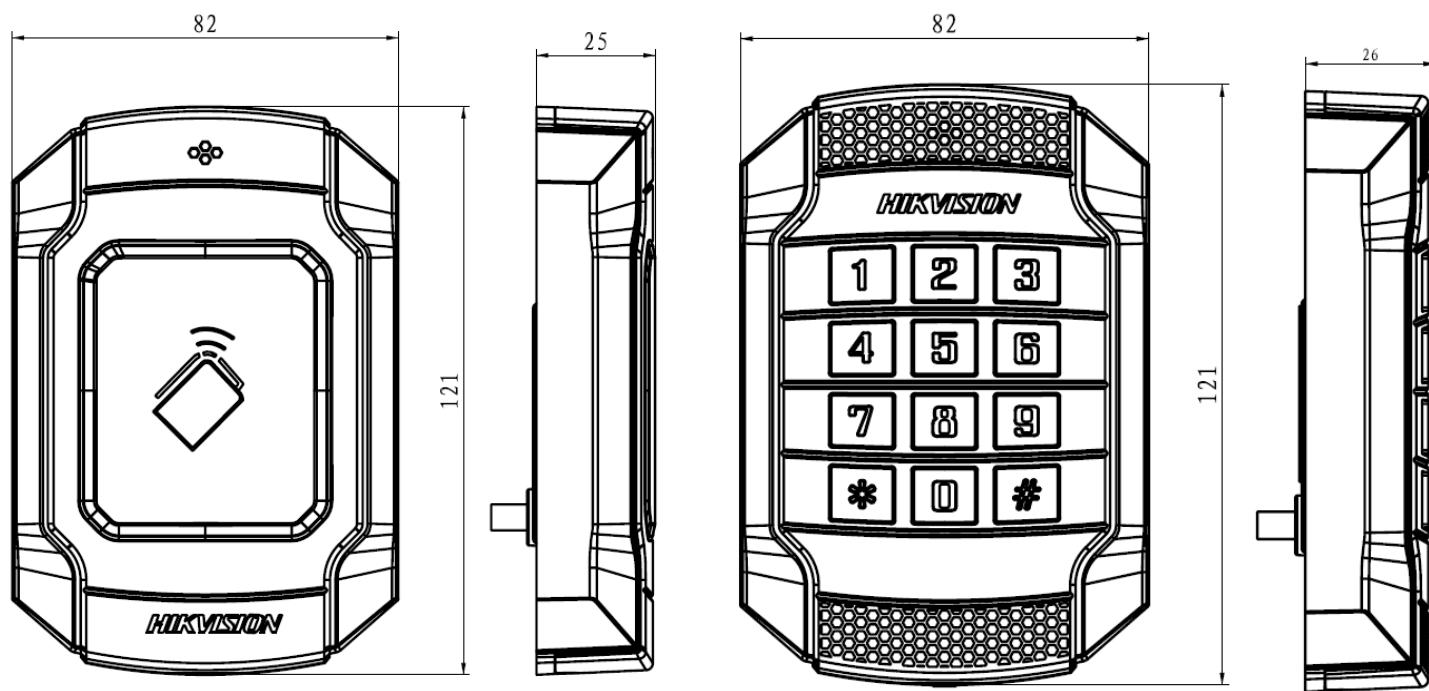

DS-K1104M

DS-K1104MK