



Schedule date		Card Report												
ID	Name	Department	Tabletion: 2011-12-30											
Date	2011-09-01	2011-09-20	2011-12-30											
Dept.	Company	Name	ID	1	Dept.	Company	Name	ID	4	Dept.	Company	Name	ID	
Absent	AFL	Out	On	Overwork	Leave	Leave early	Absent	AFL	Out	On	Overwork	Leave	Leave early	
(Day)	(Day)	(Day)	(Day)	(Time)	(Time)	(Time)	(Day)	(Day)	(Day)	(Day)	(Time)	(Time)	(Time)	
15	0	0	0	0.00	0	0	0	15	0	0	0	0.00	0	

Att. Report				Att. Report				Att. Report			
Week	First time zone	Second time zone	Overtime	Week	First time zone	Second time zone	Overtime	Week	First time zone	Second time zone	Overtime
Date	On-duty	Off-duty	Check-in	Date	On-duty	Off-duty	Check-in	Date	On-duty	Off-duty	Check-in
01 MON	02:20	11:30	13:31	01 MON	02:20	11:30	13:31	01 MON	02:20	11:30	13:31
02 TUE	09:00	11:30	13:35	02 TUE	09:00	11:30	13:35	02 TUE	09:00	11:30	13:35
03 WED	02:20	11:30	13:31	03 WED	02:20	11:30	13:31	03 WED	02:20	11:30	13:31
04 THU	09:00	11:30	13:35	04 THU	09:00	11:30	13:35	04 THU	09:00	11:30	13:35
05 FRI	02:20	11:30	13:31	05 FRI	02:20	11:30	13:31	05 FRI	02:20	11:30	13:31



You can use Excel; you can be an excellent workforce management manager!

## K80 Fingerprint Time Attendance Terminal

### Introduction

K80 is a 2.8-inch TFT screen Time Attendance & Simple Access Control Terminal. It has interfaces for third party electric lock and exit button. TCP/IP and USB Host make data management extremely easy. Most importantly, the built-in backup battery can eliminate the trouble of power-failure. With elegant appearance and reliable quality, you can get the best from it.



Copyright © 2018, ZKTeco Inc. All rights reserved.


ZKTeco may, at any time and without notice, make changes or improvements to the products and services offered and/or cease producing or commercializing them. The ZKSoftware logo and trademark are the property of ZKTeco Inc.



## Features:

- TCP/IP, USB -host
- Built-in battery
- Simple access control or external bell
- Multi languages
- SSR report in excel forms

## Configuration:

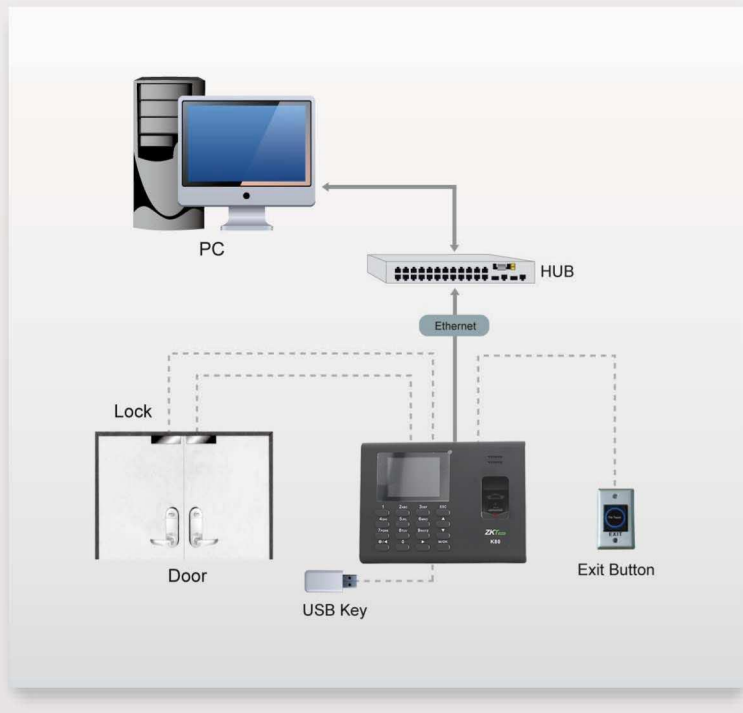

## Specifications:

Fingerprint Capacity	2000
ID Card Capacity	1000
Record Capacity	80,000
Display	2.8-inch TFT Screen
Communication	TCP/IP, USB Host
Standard Functions	Work Code, SMS, DST, Self-Service Query, Automatic Status Switch, Scheduled-bell, T9 Input, 9 Digit User ID, Built-in Battery, Simple Access Control or External Bell
Power Supply	DC 12V 1.5A
Verification Speed	≤0.5 Sec.
Operating Temp.	0°C - 45°C
Operating Humidity	20%-80%
Dimension	184*136*37.6(Length*Width*Thickness)



### ZKTeco Inc.

ZK Mansion, Wuhe Rd, Gangtou, Bantian, Buji Town, Longgang District, Shenzhen China 518129 Tel: +86-755-8960 2345/46/47/48 Fax: +86-755-8960 2675 www.zkteco.com

#### Global Service Hotline:

USA: + 1 732-412-6007  
Brazil: +55 11-5082-4315  
Mexico: +52-55-5298418  
Dubai: +971 4 6091 310  
Indonesia: +62 21 2921 8949  
Vietnam : +84-0169-5813007  
Russia: +8 915 178-46-81

EU: +34 916532891  
Thailand: +66-29144238  
South Africa: +27 12 259 1047  
India: +91-0124-2623170  
Egypt: +201110444134  
Philippines: +63 9084118832